


*Cabello de Alba y Adalid S.A.* **Telf 957684975**

- n Totalmente cerrados, protección IP-55, ventilación exterior a 2850 rpm.
- n Monofásicos incorporan protector térmico
- n Trifásicos deben ser protegidos por el usuario.




TIPO	CV	Tensión (V)	Int. (A)	Caudal m³/h	Altura manométrica m.c.a.							
					4	6	8	10	12	14	16	18
ND-14M	0,8	1x230	4,2		16,8	15,9	14,2	12,2	9,7	5		
ND-14T		220/380	2,8/1,6									
ND-19M	1	1x230	5,4		20,5	19,5	18,1	16,1	13,5	10,1	4,2	
ND-19T		220/380	3,2/1,8									
ND-24M	1,5	1x230	8		26,5	25	23,1	16,1	13,5	15	10	
ND-24T		220/380	5,6/3,2									
ND-28M	2	1x230	9		32,5	31,2	29,3	27	24,2	20,8	16	7,5
ND-28T		220/380	6,5/3,7									
MAXI-30T	3	220/380	8,6/5	47	42	37	32	25	13	5		
MAXI-40T	4		11,2/6		65	57	48	40	32	20		

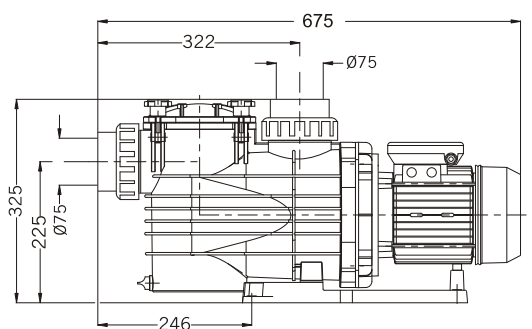

Technical drawing of the 288L barrel. The drawing shows a side view of the barrel with a central circular opening. Dimensions are indicated: a top width of 200, a height of 288, and a base width of 140, 185, and 220.

**L: 14-19 ...544**  
**24-28 ...566**

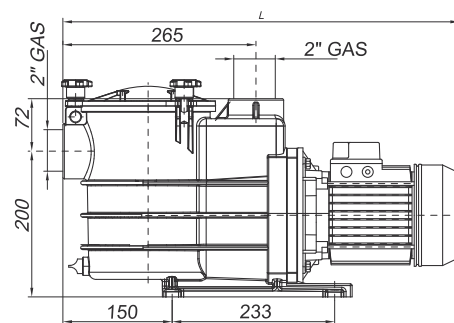

**Dimensiones en mm. orientativas, sujetas a modificaciones.**